



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04L 12/66	A1	(11) International Publication Number: WO 99/35794 (43) International Publication Date: 15 July 1999 (15.07.99)
(21) International Application Number: PCT/FI98/01026 (22) International Filing Date: 29 December 1998 (29.12.98) (30) Priority Data: 974655 31 December 1997 (31.12.97) FI (71) Applicant (for all designated States except US): SONERA OY [FI/FI]; Teollisuuskatu 15, FIN-00510 Helsinki (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): JAAKKOLA, Jorma [FI/FI]; Palmusalonie 3, FIN-01760 Vantaa (FI). SARKKI, Mika [FI/FI]; Norotie 6 D 41, FIN-01600 Vantaa (FI). (74) Agent: PAPULA REIN LAHTELA OY; Fredrikinkatu 61 A, P.O. Box 981, FIN-00101 Helsinki (FI).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the</i> <i>claims and to be republished in the event of the receipt of</i> <i>amendments.</i> <i>In English translation (filed in Finnish).</i>
(54) Title: SUBSCRIBER DATA HANDLING IN TELECOMMUNICATIONS NETWORKS (57) Abstract <p>The invention relates to a system (2) and a procedure for the management of subscriber data in conjunction with at least two duplex telecommunication networks handling separate subscriber data. According to the invention, the system comprises means (1) for linking the system (2) in a transparent manner in respect of telecommunication network architecture to telecommunication network elements handling subscriber data, means for storing the subscriber data of different telecommunication networks in logically the same database (12), and means (13) for exchanging subscriber data between the telecommunication network elements handling subscriber data and/or the subscriber database. The system can be used e.g. to implement an accessibility service between different networks.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LJ	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

SUBSCRIBER DATA HANDLING IN TELECOMMUNICATIONS NETWORKS

The present invention relates to telecommunication. In particular, the invention relates to a new
5 and advanced method and system for the management of subscriber data in telecommunication networks.

A problem with the services provided at present via various networks (e.g. GSM, Global System for Mobile communications; PSTN, Public Switched Telephone
10 Network; Internet) is that they are designed to work only in a particular network. Each network has different practices for the handling of subscriber data. Locating services are tied to their target network and the accessibility of a person can only be treated
15 within a given network. A person may be accessible e.g. via the Internet at a location where no paging network can be used.

The object of the present invention is to eliminate the problem described above. A specific object of the present invention is to disclose a new type
20 of system and procedure in which subscriber data and above-mentioned services are available between different networks and in which the services can be directed to use the network currently used by the subscriber irrespective of the network interface. The invention
25 makes it possible to create e.g. an accessibility service between different networks.

As for the features characteristic of the present invention, reference is made to the claims.

30 The system of the invention transmits and modifies subscriber data in conjunction with at least two duplex telecommunication networks handling different subscriber data. The telecommunication network is e.g. a public telephone network, a digital multi-
35 service network, a public mobile communication network, a paging network, a message service network, a telex network or an IP-based network (IP, Internet Protocol).

The system comprises means for connecting the system, transparently in respect of the telecommunication system architecture, to telecommunication network elements handling subscriber data. 'Transparently' here means
5 that the system does not require any changes in the architecture of the existing networks.

The system comprises means for storing the subscriber data for different telecommunication networks in logically the same database. The data of the
10 database may be distributed in different elements while still essentially forming part of an entity interpreted as a single database.

The system comprises means for exchanging subscriber data between telecommunication network elements
15 handling subscriber data and/or the database. Examples of exchangeable data are data indicating the subscriber's location and in which network and at what time the subscriber can be reached, or subscriber-specific service data, including the services used by
20 the subscriber.

In a preferred embodiment of the invention, the system comprises means for the transmission of signalling between different telecommunication networks.

In a preferred embodiment of the invention,
25 the system comprises means for converting data types so that the data type of the subscriber data is compatible with the database comprised in the system and with the data types of the network element of the telecommunication network linked to the system.

In a preferred embodiment of the invention,
30 the system comprises means for forming a service profile for the subscriber. From the service data for each subscriber, it is possible to determine the network and service that the subscriber prefers to use.

In a preferred embodiment of the invention,
35 the system comprises means for ensuring uninterrupted operation. The system is a critical component as regards network-independent services.

In a preferred embodiment of the invention, the system is implemented in the terminal device. In this case, the services are implemented and activated separately in each terminal device of the subscriber, taking the properties of each network into account.

In a preferred embodiment of the invention, a means comprised in the system is implemented as a part of a network element. The means comprised in the system may also be implemented as a module which is added to a network element of an existing telecommunication network.

The system of the invention provides the advantage of a uniform external interface to service user information for use e.g. in customer management systems. The system makes it possible to create a new and more advanced accessibility service in which the subscriber can be reached via a single interface from different telecommunication networks. The system saves network capacity. Subscriber search from other networks can be accomplished as a simple database search without setting up a complete telecommunication connection. Subscriber data can be practically managed in real time as the system is connected with elements exchanging subscriber data. In other words, a search service can be implemented as a simple exchange of characters.

In the following, the invention will be described by the aid of a few examples of its embodiments by referring to the attached drawing, wherein

Fig. 1 is a diagrammatic representation of a system according to the invention, and

Fig. 2 presents another embodiment of the invention, connected as a part of existing network elements.

As an example, the handling of subscriber location data will be now described. When the system 2 of the invention is added to the GSM network 3, it is connected between the MSC/VLR 4 (MSC/VLR, Mobile services Switching Center/Visitor Location Register) and the HLR

5 (HLR, Home Location Register) via means 1a. When the MSC/VLR 4 exchanges information with the HLR 5, the communication is transmitted via the system 2, which picks out the required data from the communication and transmits the communication further to the HLR 5 without altering the messages between the MSC 4 and the HLR 5. Thus, the system 2 has obtained subscriber location data from the communication between the MSC/VLR and the HLR in the GSM network 3 by filtering.

The location information is stored in the database 12 of the system 2 by using means 13. This information could be utilised e.g. in an intelligent network service (IN, Intelligent Network) provided in a PSTN network 6, in which a service control point 7 (SCP, Service Control Point) sends a subscriber data inquiry to a service data point 8 (SDP, Service Data Point). Instead of being passed to the data point 8, the inquiry is directed using means 1b to the system 2, which may return the subscriber data immediately or direct the original inquiry to the service data point 8. After receiving a response from the service data point 8, the system 2 can add desired information to the data obtained from the service data point 8 and return the response to the service control point 7.

A corresponding practice can also be applied in a TCP/IP network 9 (TCP/IP, Transmission Control Protocol/Internet Protocol), where the system can be used as a server for various directory services. In an example, the system 2 is connected between a terminal 11 and a gatekeeper 10 as defined by the ITU H.323 standard series (ITU, International Telecommunications Union) via means 1c. The terminal logs on into the gatekeeper 10 and queries for information concerning call setup. The communication is transmitted via the system, which filters the required data from it. Exchange of information between the terminal 11 and the gatekeeper 10 works in the same way as in a network in which the system 2 of the invention is not used.

By the method described above, it is possible to implement an accessibility service that is considerably more advanced than present systems. When someone is trying to reach a subscriber e.g. via the GSM network, he/she may leave a message in the subscriber's telephone answering machine. Based on the subscriber's service profile formed using means 15, this message is transferred to the network considered best, e.g. to the Internet, where the message left in the answering machine is converted into an electronic mail message. The system 2 always contains information about the subscriber data of each network; for instance, a subscriber's location can be determined from the location data so that it can be used e.g. in an answering service.

The load on the system of the invention can be managed because, in present networks, subscribers can be distributed among different network components containing subscriber data so that only data for subscribers using network-independent services and the associated search and processing operations are routed via the system by using suitable signalling. The system 2 is provided with means 14 for the transmission of signalling.

The essential point about the system 2 is that it concentrates subscriber data, location and service data in the same system with the signalling of different telecommunication networks. The system 2 functions as a gateway between different networks. Since the subscriber data of all the networks that have joined the system are collected in the same database, a telecommunication connection between two different networks can be set up directly between the networks without having to check the subscriber data via a third network. In practice the system 2 also works in real time, thus differing from prior-art procedures in which subscriber data are handled by a batch processing method, collect-

ing subscriber data for several subscribers at the same time.

Fig. 2 presents a system according to the invention the invention, in which the means used in the system 2 are implemented as a part of the existing network elements. The system 2 is physically distributed as additional modules built into different network elements implementing the functions of the system 2.

The present application is based on Finnish application FI 980667, which has been filed on 25.3.1998 and whose contents are included here by this reference.

The invention is not restricted to the examples of its embodiments described above, but many variations are possible within the scope of the inventive idea defined by the claims.

CLAIMS

1. System (2) for the management of subscriber data in conjunction with at least two duplex telecommunication networks handling different subscriber data, characterised in that the system (2) comprises
- 5 - means (1) for linking the system (2) in a transparent manner as regards telecommunication network architecture to telecommunication network elements handling subscriber data,
- 10 - means for storing the subscriber data of different telecommunication networks in logically the same database (12), and
- means (13) for exchanging subscriber data between the telecommunication network elements handling subscriber data and/or the subscriber database.
- 15 2. System as defined in claim 1, characterised in that the system (2) comprises means (14) for the transmission of signalling between different telecommunication networks.
- 20 3. System as defined in claim 1 or 2, characterised in that the system (2) comprises means (1) for converting data types between the telecommunication network and the database.
4. System as defined in any one of claims 1 -
- 25 3, characterised in that the system (2) comprises means (15) for forming a service profile for the subscriber.
5. System as defined in any one of claims 1 -
- 30 4, characterised in that a means comprised in the system (2) is implemented as a part of a network element.
6. System as defined in any one of claims 1 -
- 5, characterised in that the system (2) is implemented in a terminal device.
- 35 7. Procedure for the management of subscriber data in conjunction with at least two duplex telecommu-

nication networks handling separate subscriber data,
characterised in that

- a connection transparent in respect of the
telecommunication system architecture is established to
5 telecommunication network elements handling subscriber
data,

- the subscriber data for different telecommu-
nication networks are stored in logically the same da-
tabase,

10 - subscriber data are exchanged between the
telecommunication network elements handling subscriber
data and/or the subscriber database.

8. Procedure as defined in claim 7, char-
acterised in that signalling is transmitted be-
15 tween different telecommunication networks.

9. Procedure as defined in claim 7 or 8,
characterised in data types are converted be-
tween the telecommunication network and the database.

10. Procedure as defined in any one of claims
20 7 - 9, characterised in that a service pro-
file for the subscriber is formed.

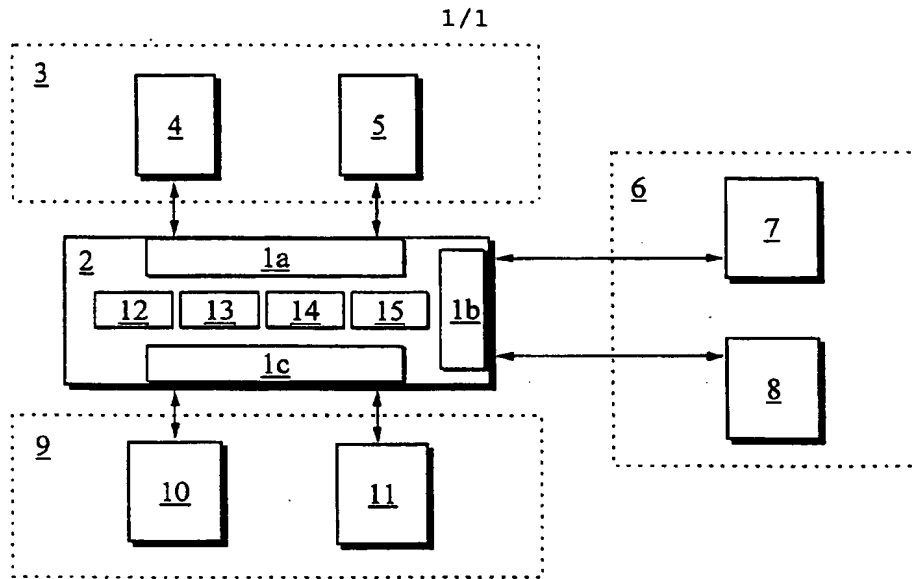


Fig. 1

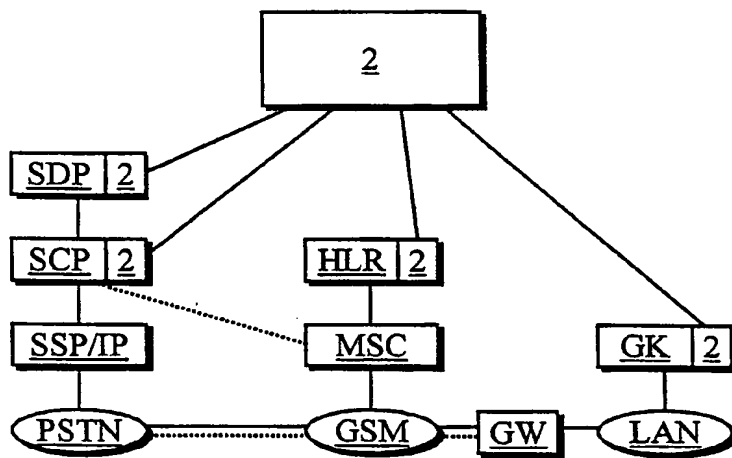


Fig. 2

1
INTERNATIONAL SEARCH REPORTInternational application No.
PCT/FI 98/01026

A. CLASSIFICATION OF SUBJECT MATTER		
IPC6: H04L 12/66 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC6: H04Q, H04L, H04B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
SE,DK,FI,NO classes as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
WPIL, EDOC		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9638018 A1 (TELEFONAKTIEBOLAGET LM ERICSSON), 28 November 1996 (28.11.96), see the whole document --	1-10
A	WO 9509514 A1 (NOKIA TELECOMMUNICATIONS OY), 6 April 1995 (06.04.95), see the whole document -- -----	1-10
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
<p>* Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"I" later document published after the international filing date (or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention)</p> <p>"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>		
Date of the actual completion of the international search		Date of mailing of the international search report
7 June 1999		07 -06- 1999
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer Malin Gullstrand/cs Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

03/05/99

International application No.
PCT/FI 98/01026

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9638018 A1	28/11/96	AU 5916696 A	11/12/96
		CA 2221183 A	28/11/96
		CN 1185268 A	17/06/98
		EP 0829181 A	18/03/98
		FI 952557 D	00/00/00
		NO 975343 A	21/01/98
		FI 961690 A	25/11/96
WO 9509514 A1	06/04/95	AU 681191 B	21/08/97
		AU 7700794 A	18/04/95
		CN 1132014 A	25/09/96
		EP 0721729 A	17/07/96
		FI 94698 B,C	30/06/95
		FI 934259 A	29/03/95
		JP 9503360 T	31/03/97
		US 5828959 A	27/10/98

THIS PAGE BLANK (USPTO)